



Ficha técnica/Data sheet/Fiche technique



SERIE: UFO PRO 100W 5700K 120

CODE: E8-4468



ALUMINIO
ALUMINIUM
ALUMINIUM



CLASE 1
CLASS 1
CLASSE 1



CE APROBADO
CE APPROVED
CE APPROUVÉ




ROHS APROBADO
ROHS APPROVED
ROHS APPROUVÉ



PROTECCIÓN
PROTECTION
PROTECTION



ÍNDICE DE PROTECCIÓN IK
IK PROTECTION INDEX
INDICE DE PROTECTION IK

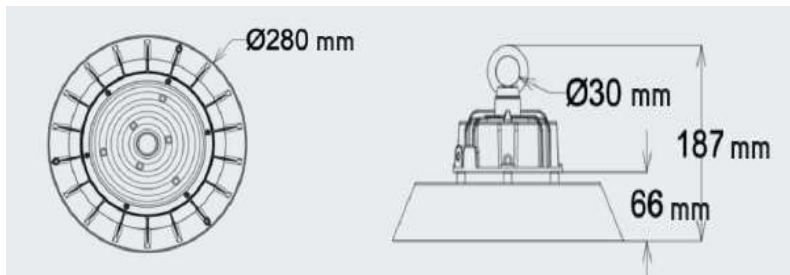

INFORMACIÓN BÁSICA/BASIC INFORMATION/INFORMATION DE BASE


INSTALACIÓN	INSTALLATION	INSTALLATION
Suspendida/Superficie	Suspended/Surface	Suspendu/Surface
MATERIAL	MATERIAL	MATÉRIEL
Aluminio	Aluminium	Aluminium
ACABADO	FINISH	FINITION
Negro	Black	Noir
USO	USE	UTILISER
Interior/Exterior	Indoor/Outdoor	À L'Intérieur/Extérieur
GARANTÍA	WARRANTY	GARANTIE
5 Años	5 Years	5 Ans

INFORMACIÓN TÉCNICA/TECHNICAL INFORMATION/INFORMATION TECHNIQUE


Datos lumínicos/Light data/Données lumineuses

Temperatura de color/Color temperature/Température de couleur	5700 K
Índice reproducción cromática/Color rendering index/Indice de rendu des couleurs	>70
Lúmenes/lumens	13.000 lm
Eficiencia lumínica/Light efficiency/Efficacité lumineuse	130 lm/w
Óptica/Optics/Optique	Opal/Opale
Ángulo de apertura/Beam angle/Angle d'ouverture	120°
Orientable/Adjustable/Ajustable	No/Not/Ne pas
Grados de orientación/Orientation degress/Degrés d'orientation	-
Vida útil/Useful life/Durée de vie	L70 50.000H

Fotometría Polar/polar photometry/photométrie pola

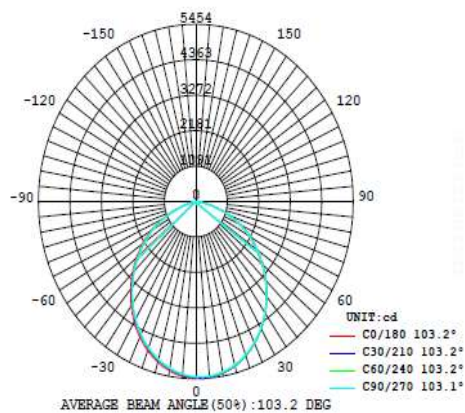

Fotometría cónica/Cone photometry/Photométrie conique

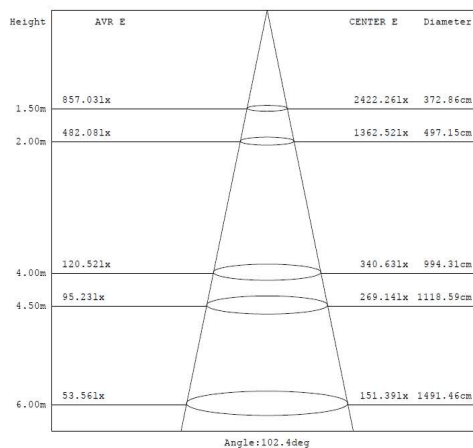



Datos eléctricos/Electrical

Potencia/Power/Puissance	100W
Tensión/Voltage/Tension	90-305V AC
Frecuencia/Frequency/Fréquence	50-60 Hz
Factor de potencia/Power factor/Facteur de puissance	>0,95
Control de regulación/Regulation control/Contrôle de régulation	0-10V
Driver	PHILIPS XITANIUM
LED	LUMILEDS 2835
Clase de aislamiento/Insulation class/Classe d'isolation	I
Clasificación energética/Energy classification/Classement énergétique	A++

Datos mecánicos/Mechanical data/Données mécaniques

Temperatura funcionamiento/Operating temperature/Température de fonctionnement	-30°C+50°C
Accesorios/Accessories/Accessoires	*Consultar/Consult/Consulter
Dimensiones producto/Recessed dimensions/dimensions de produit	Ø280 x 187 mm
IK	IK08
IP	IP65

EMBALAJE/PACKAGING / EMBALLAGE

	CAJA/BOX/ BOÎTE
MEDIDAS/SIZE/MEASURES	L330XW330XH180 mm
PESO/WEIGHT/POIDS	2,1 Kg
UNIDADES/UNITS/UNITÉS	1